


**PILLAR**

**Pillar Cassette Seal<sup>®</sup>**

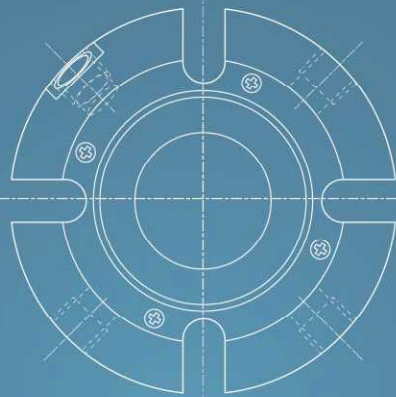

**NIPPON PILLAR PACKING CO., LTD.**

## ▶ Reliability

Thanks to the sleeve integral design, our mechanical seal has a long term stable performance. In addition, springs position contributes in eliminating leakage preventing the deterioration of seal ring operability.

## ▶ Adaptability

"Type GABE 5" for high pressure, "type GXKEM" for high concentration slurry and "tandem seal type" are added, centered on "type GAKEM" adopted with knife edge seal.

## ▶ Simplicity


The installation of the mechanical seal doesn't require more than 4 steps.

## ▶ Changeability

Ideal for replacing from gland packing

# Pillar Cassette Seal <sup>®</sup>

Cassette seal cross section  
GXKEM

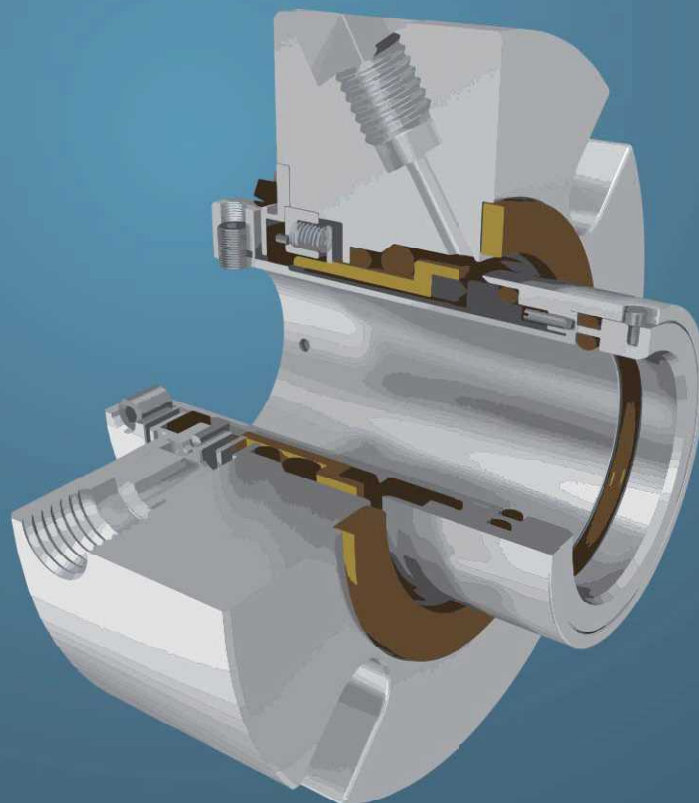

# Pillar Cassette Seal Line up



"Pillar Cassette Seal" has many characteristics such as stationary cartridge and easy installation.

Various options are provided so that Pillar Cassette Seal can be applied to a wider range of use.

## GAKEM

### STANDARD · KNIFE EDGE TYPE



Standard configuration for SiC vs. SiC (seal face material) + knife edge seal.

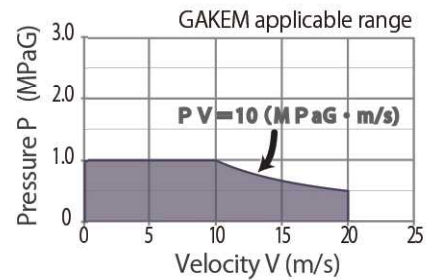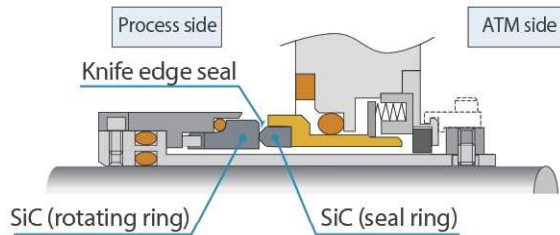

## GXKEM

### HIGH CONCENTRATION SLURRY COMPATIBLE TYPE



Shielded O-ring minimizes the adverse effect of slurry.

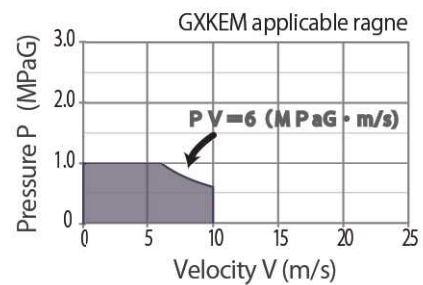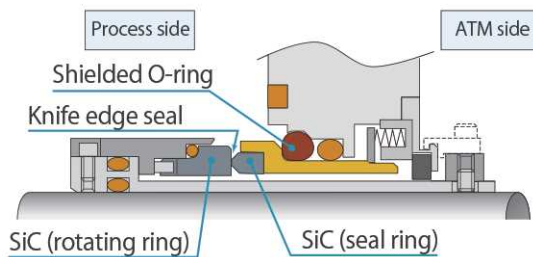

## GABE5


### HIGH PRESSURE TYPE

With a versatile seal face, combining SiC and Carbon, this type supports fluid pressure up to 2.5MPaG

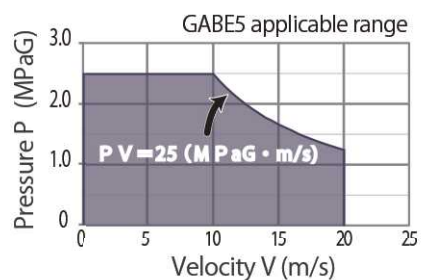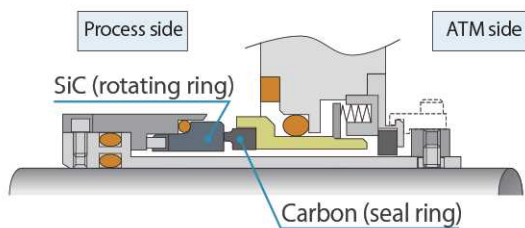

## Tandem Seal Option


An atmospheric side secondary seal can be designed integrally with any pillar cassette seal. By tandem seal, it can deal with minimum leakage and scattering of quench liquid.

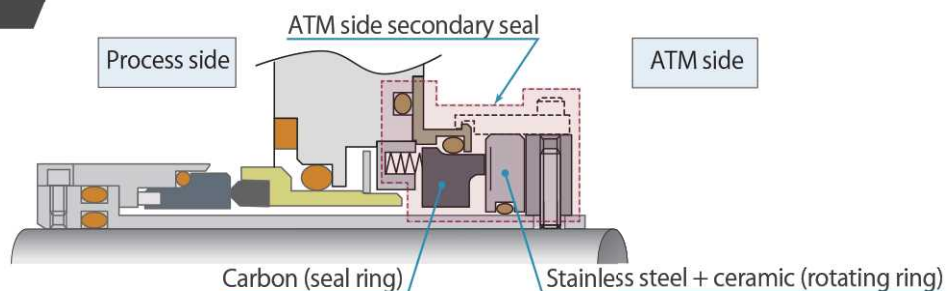

※The figure is in combination with GAKEM.


# 4 actions installation

"Compact design" which can be applied by bolt on to ISO · DIN standard pumps.  
The "4 actions installation" does not require measuring or equipment dimension adjustment which widens the range pumps it can be applied on.

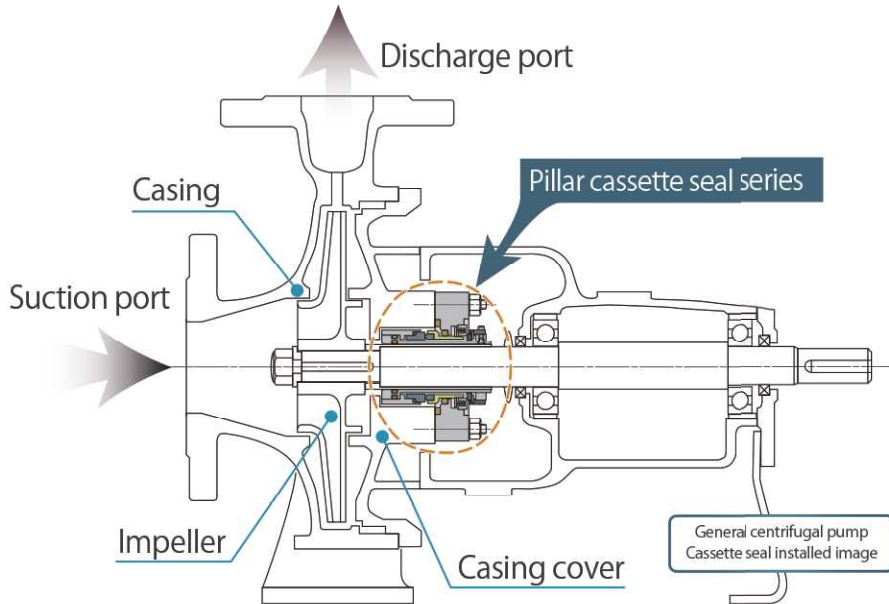


## 4 ACTIONS INSTALLATION

### Action 1




Insert "cassette seal assembly" on to the shaft of the pump from which the casing, impeller and casing cover are removed.

### Action 2

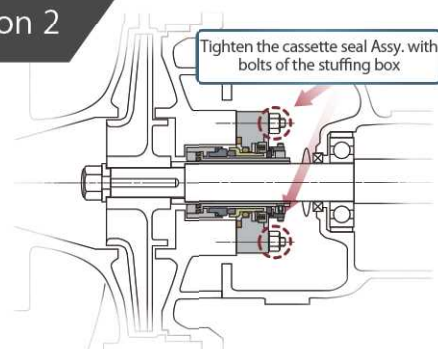


After reassembling the pump main body, fix the "cassette seal assembly" with the stuffing box bolt.

### Action 3

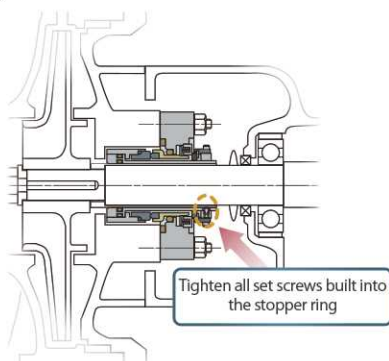

Tighten all of the cassette seal's set screws and secure the seal rotation side part and the pump shaft.

### Action 4




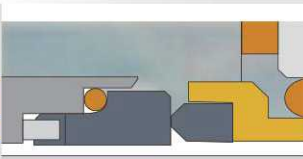

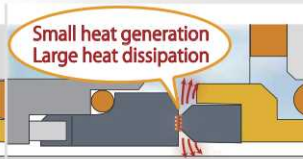
In the state of "Assy.", Remove the "set plates" that had been restricted to the prescribed tightening length, and the installation work of the mechanical seal is completed. (Note) "Set plate" is also necessary for removing cassette seal.

# Pillar Seal

"Unique technology of pillar's mechanical seal" has been backed up and improved as a result of years of experience. Inherent technologies are standard loaded in the "cassette seal series". Product's reliability and versatility distinguish them from equivalent products.

## KNIFE EDGE TECHNOLOGY


- 1 SiC (Silicon carbide) is adopted as the seal face. It has an excellent abrasion and chemical resistance which extend its service life.
- 2 It is particularly suitable for difficult sealing fluid such as "highly viscous and coagulable fluid".
- 3 Due to its reduced heat generation and its excellent heat dissipation performance, depending on the conditions, it can be used without flushing .
- 4 It is also characterized by low energy loss due to low sliding resistance.

IDEAL FOR HIGH VISCOSITY AND COAGULATING FLUID		REDUCED SLIDING HEAT GENERATION EXCELLENT COOLING PERFORMANCE	
			
<b>Standard Mechanical Seal</b> Bite of high viscosity liquid creates coagulum on the seal face which causes opening of the sealing surface and increases the amount of leakage.	<b>Knife edge seal</b> High surface pressure, due to narrow face, prevents biting of high viscosity liquid and removes coagulates. Therefore, sealing surface opening is less likely to occur which guarantees high sealing performance.	<b>Standard Mechanical Seal</b> An important seal face's surface generate a large amount of heat. If the cooling is insufficient, this may cause lubrication film breakage and seizure.	<b>Knife edge seal</b> Because the seal face is narrow, the amount of heat generation decreases. Also, it has a large heat dissipation area and excellent cooling performance on the seal end face.

※This technology does not apply to GABE 5

## HIGHLY RESISTANT SLURRY TECHNOLOGY

In addition to the versatile advantage of the knife edge seal, the GXKEM type is equipped with a new mechanism "Shield O ring". Cassette seal can also be applied to services under high slurry concentration.

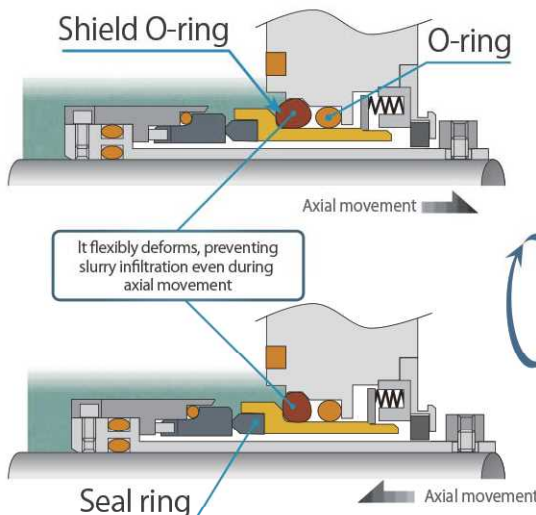


Mechanical seal for slurry is needed to solve following technical problems simultaneously.  
 "Measures to prevent adhesion of fine particles to the O-ring" and  
 "securing followability of the seal ring."

"Shield O ring" of GXKEM type is made of special soft rubber. Its flexibility deforms freely by itself, ensuring followability of the seal ring and preventing entry of fine particles into the working O-ring.

※ Equipped with GXKEM type

# Structure, Dimensions

**GAKEM**

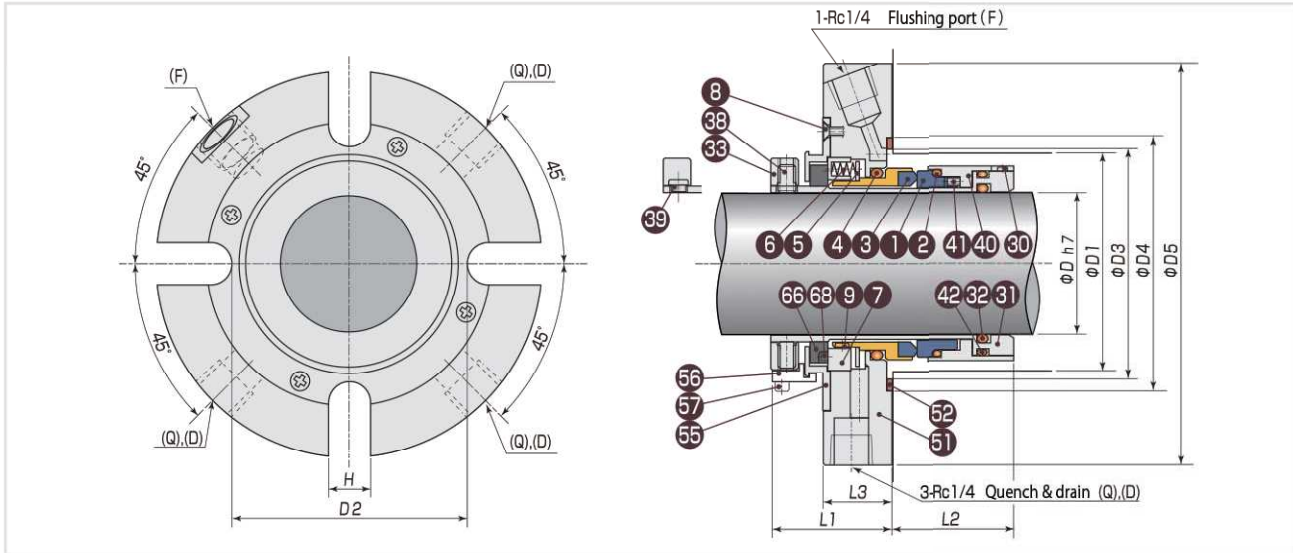


Max. pressure: 1.0 MPaG  
 Velocity: ~20 m/s  
 Operating temperature: -20~+150°C<sup>※1,※2</sup>  
 Slurry concentration: max 10wt%<sup>※3</sup>

※1: Refer to the table below for applicable temperature range depending on O ring material.

※2: There is a separate [maximum boiling point of fluid -20°C] for maximum operating temperature. For higher temperature, please apply with a flushing cooler or external flushing.

※3: This value is a reference value based on experiment. Depending on the properties of the slurry, the indicated value may not be satisfied. Depending on the conditions, quenching may be required.

Material	Temperature inside the stuffing box (°C)
NBR	-20~60
EPDM	-20~100
FKM	0~150
Silicon rubber	0~150

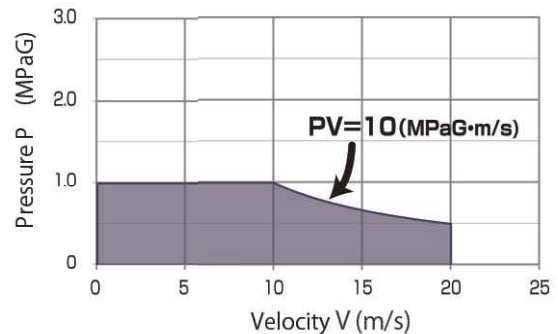


Nominal diameter	D (Shaft Diameter)	D1 (min)	D1 (max)	D2	D3	D4	D5	L1	L2	L3	H
020	20	36	48	56	46	54	98	35	35	21	12
025	25	41	53	61	51	59	105	35	35	21	12
028	28	44	56	64	54	62	108	35	35	21	12
030	30	46	58	66	56	64	108	35	35	21	12
032	32	48	60	68	58	66	115	35	35	21	14
035	35	51	63	71	61	69	115	35	35	21	14
038	38	57	66	76	66	74	125	38	39	22	14
040	40	59	68	78	68	76	125	38	39	22	14
042	42	61	70	80	70	78	128	38	39	22	14
045	45	64	73	83	73	81	128	38	39	22	14
048	48	67	76	86	76	84	135	38	39	22	16
050	50	69	78	88	78	86	135	38	39	22	18
055	55	74	83	93	83	91	158	38	39	22	18
060	60	79	88	98	88	96	164	38	39	22	18
065	65	87	94	108	94	105	168	43	43	24	18
070	70	92	99	113	99	110	178	43	43	24	18
075	75	99	108	122	105	119	198	45	43	24	22
080	80	105	113	128	110	124	198	45	43	24	22
085	85	110	118	133	115	129	208	45	43	24	22
090	90	115	123	138	120	134	208	45	43	24	22
095	95	120	128	143	125	139	218	45	43	24	22
100	100	125	133	148	130	144	218	45	43	24	22

No.	Part	Material	Qty
1	Rotating ring	SiC	1
2	O ring	FKM	1
3	Seal ring	SiC&Titanium	1
4	O-ring	FKM	1
5	Plate	304 or eq.	1
6	Spring	316 or eq.	1s
7	Spring retainer	304 or eq.	1
8	Bolt	304 or eq.	4
9	Pin	304 or eq.	2
30	Pin	316 or eq.	1
31	Sleeve	316 or eq.	1
32	O-ring	FKM	1
33	Stopper ring	304 or eq.	1
38	Set screw	316 or eq.	4
39	Pin	304 or eq.	2
40	Drive ring	316 or eq.	1
41	Pin	304 or eq.	1
42	O-ring	FKM	1
51	Flange	316 or eq.	1
52	Gasket	FKM	1
55	Adapter	304 or eq.	1
56	Set plate	Carbon steel	3
57	Cap screw	304 or eq.	3
66	Throttle bush	Carbon	1
68	Pin	304 or eq.	1

● The above material is represented by GAKEM-KF 022 type as a typical example.  
 ● In the above table, the O ring material is FKM, but you can choose from other EPDM, silicone rubber, NBR.  
 (Specifications depend on the material)

# and Spec.

## GABE5

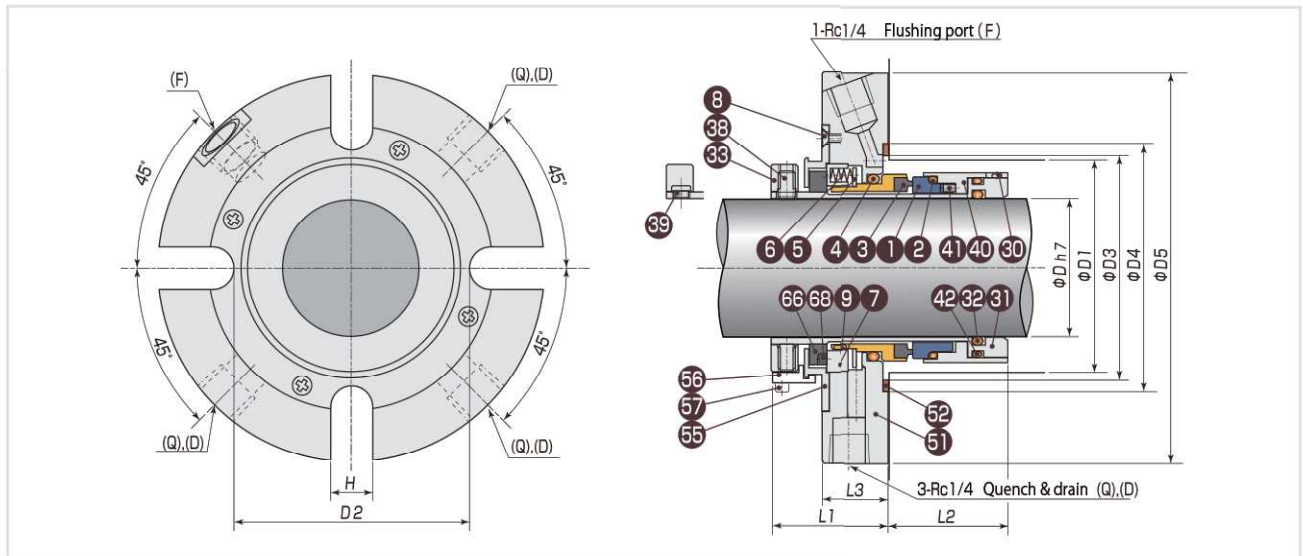


Max. pressure: 2.5 MPaG  
 Velocity: ~20 m/s  
 Operating temperature: -20~+150°C<sup>※1,※2</sup>

※1: Refer to the table below for applicable temperature range depending on O-ring material.

※2: There is a limitation [maximum boiling point of fluid -20°C] for maximum operating temperature. For higher temperature, please apply with a flushing cooler or external flushing.

Material	Temperature inside the stuffing box (°C)
NBR	-20~60
EPDM	-20~100
FKM	0~150
Silicon rubber	0~150

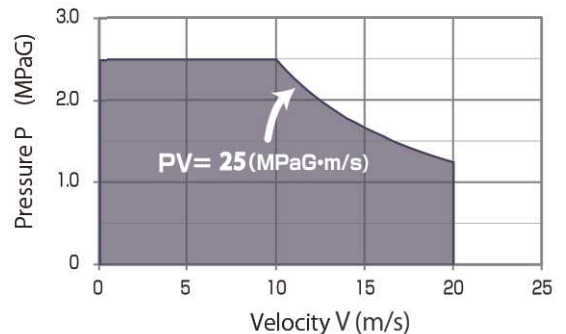


Nominal diameter	D (Shaft diameter)	D1 (min)	D1 (max)	D2	D3	D4	D5	L1	L2	L3	H
020	20	36	48	56	46	54	98	35	35	21	12
025	25	41	53	61	51	59	105	35	35	21	12
028	28	44	56	64	54	62	108	35	35	21	12
030	30	46	58	66	56	64	108	35	35	21	12
032	32	48	60	68	58	66	115	35	35	21	14
035	35	51	63	71	61	69	115	35	35	21	14
038	38	57	66	76	66	74	125	38	39	22	14
040	40	59	68	78	68	76	125	38	39	22	14
042	42	61	70	80	70	78	128	38	39	22	14
045	45	64	73	83	73	81	128	38	39	22	14
048	48	67	76	86	76	84	135	38	39	22	16
050	50	69	78	88	78	86	135	38	39	22	18
055	55	74	83	93	83	91	158	38	39	22	18
060	60	79	88	98	88	96	164	38	39	22	18
065	65	87	94	108	94	105	168	43	43	24	18
070	70	92	99	113	99	110	178	43	43	24	18
075	75	99	108	122	105	119	198	45	43	24	22
080	80	105	113	128	110	124	198	45	43	24	22
085	85	110	118	133	115	129	208	45	43	24	22
090	90	115	123	138	120	134	208	45	43	24	22
095	95	120	128	143	125	139	218	45	43	24	22
100	100	125	133	148	130	144	218	45	43	24	22

No.	Part	Material	Qty
1	Rotating ring	SiC	1
2	O-ring	FKM	1
3	Seal ring	SiC&Titanium	1
4	O-ring	FKM	1
5	Plate	304 or eq.	1
6	Spring	316 or eq.	1s
7	Spring retainer	304 or eq.	1
8	Bolt	304 or eq.	4
9	Pin	304 or eq.	2
30	Pin	316 or eq.	1
31	Sleeve	316 or eq.	1
32	O-ring	FKM	1
33	Stopper ring	304 or eq.	1
38	Set screw	316 or eq.	4
39	Pin	304 or eq.	2
40	Drive ring	316 or eq.	1
41	Pin	304 or eq.	1
42	O-ring	FKM	1
51	Flange	316 or eq.	1
52	Gasket	FKM	1
55	Adapter	304 or eq.	1
56	Set plate	Carbon steel	3
57	Cap screw	304 or eq.	3
66	Throttle bush	Carbon	1
68	Pin	304 or eq.	1

\* The above material is represented by GABE5-KF022 type as a typical example.  
 \* In the above table, the O ring material is FKM, but you can choose from other EPDM, silicone rubber, NBR.  
 (Specifications depend on the material)

# Structure, Dimensions


**GXKEM**

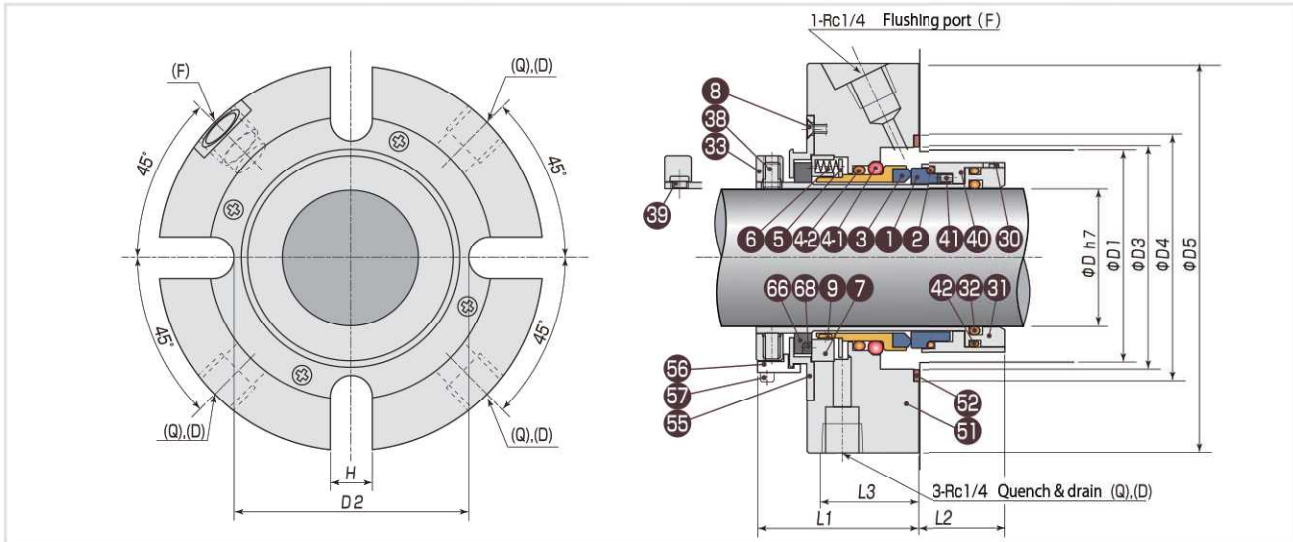

Max. working pressure: 1.0 MPaG  
 Velocity: ~10 m/s  
 Operating temperature limit: -20~+150°C<sup>※1,※2</sup>  
 Slurry concentration: max 30wt%<sup>※3</sup>

※1: Refer to the table below for applicable temperature range depending on O ring material.  
 ※2: There is a separate [maximum boiling point of fluid -40°C] for maximum operating temperature. For higher temperature, please apply with a flushing cooler.  
 ※3: This value is a reference value based on experiment. Depending on the properties of the slurry, the indicated value may not be satisfied. Depending on the conditions, quenching may be required.

Material	Temperature inside the stuffing box (°C)
NBR	-20~60
EPDM	-20~100
FKM	0~150
Silicon rubber	0~150

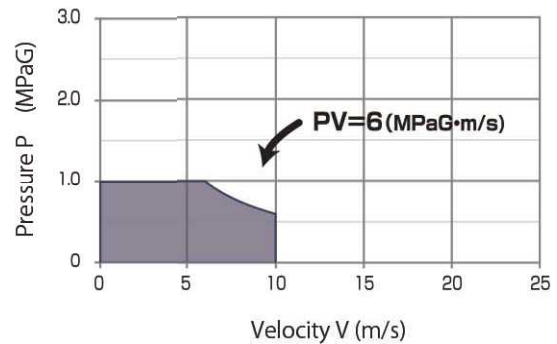

Nominal diameter	D <sub>Shaft (Diameter)</sub>	D1 (min)	D1 (max)	D2	D3	D4	D5	L1	L2	L3	H
020	20	36	48	56	46	54	98	49	25	35	12
025	25	41	53	61	51	59	105	49	25	35	12
028	28	44	56	64	54	62	108	49	25	35	12
030	30	46	58	66	56	64	108	49	25	35	12
032	32	48	60	68	58	66	115	49	25	35	14
035	35	51	63	71	61	69	115	49	25	35	14
038	38	57	66	76	66	74	125	53	28	37	14
040	40	59	68	78	68	76	125	53	28	37	14
042	42	61	70	80	70	78	128	53	28	37	14
045	45	64	73	83	73	81	128	53	28	37	14
048	48	67	76	86	76	84	135	53	28	37	16
050	50	69	78	88	78	86	135	53	28	37	18
055	55	74	83	93	83	91	158	53	28	37	18
060	60	79	88	98	88	96	164	53	28	37	18

No.	Part	Material	Qty
1	Rotating ring	SIC	1
2	O-ring	NBR	1
3	Seal ring	SIC&Titanium	1
4-1	Shield O-ring	NBR	1
4-2	O-ring	NBR	1
5	Blade	304 or eq.	1
6	Spring	316 or eq.	1s
7	Spring retainer	304 or eq.	1
8	Bolt	304 or eq.	4
9	Pin	304 or eq.	2
30	Pin	316 or eq.	1
31	Sleeve	316 or eq.	1
32	O-ring	NBR	1
33	Stopper ring	304 or eq.	1
38	Set screw	316 or eq.	4
39	Pin	304 or eq.	2
40	Drive ring	316 or eq.	1
41	Pin	304 or eq.	1
42	O-ring	NBR	1
51	Flange	316 or eq.	1
52	Gasket	NBR	1
55	Adapter	304 or eq.	1
56	Set plate	Carbon steel	3
57	Cap screw	304 or eq.	3
66	Throttle bush	Carbon	1
68	Pin	304 or eq.	1

\* The above material is represented by GXKEM-TN000 type as a typical example.  
 \* In the above table, the O ring material is NBR, but you can choose from other EPDM, silicone rubber, FKM. (Specifications depend on the material)





# and Spec.

## Cassette Tandem Seal

### FCURO-JF044×GAKEM-TF044

※ Cassette seal / Illustrates tandem seals for GAKEM type

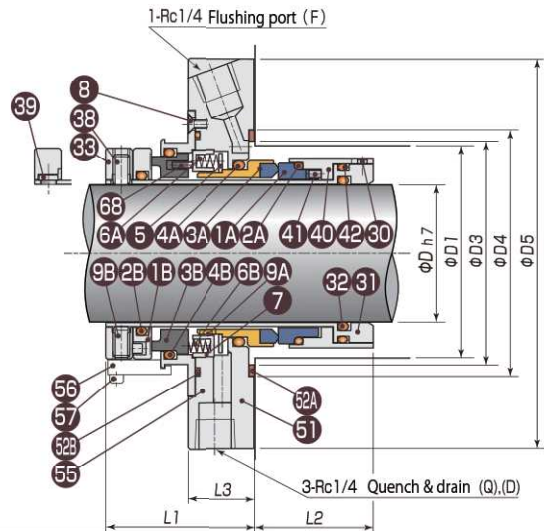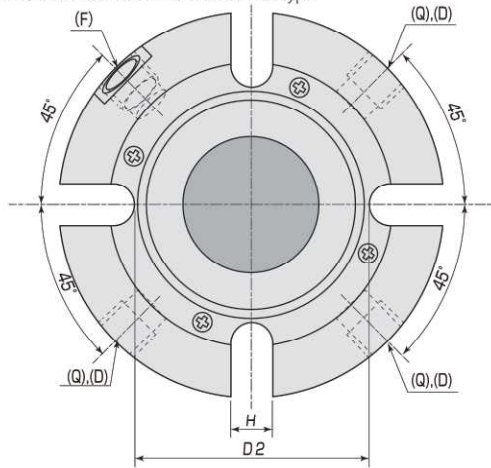

Max. pressure: 1.0 MPaG

Velocity: ~20 m/s

Operating temperature: -20~+150°C<sup>※1,※2</sup>


Slurry concentration: max 10wt%<sup>※3</sup>

※1: Refer to the table below for applicable temperature range depending on O ring material.

※2: There is a separate [maximum boiling point of fluid -20°C] for maximum operating temperature. For higher temperature, please apply with a flushing cooler.

※3: This value is a reference value based on experiment. Depending on the properties of the slurry, the indicated value may not be satisfied. Depending on the conditions, quenching may be required.

Material	Temperature inside the stuffing box (°C)
NBR	-20~60
EPDM	-20~100
FKM	0~150
Silicon rubber	0~150

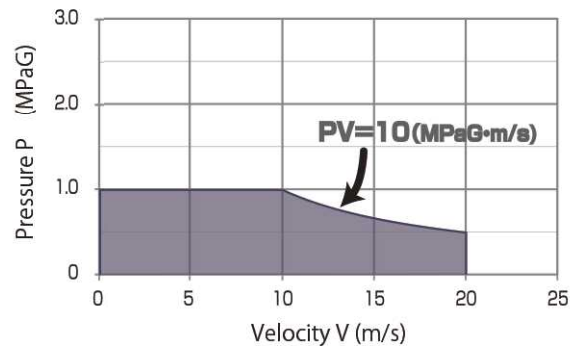

Nominal diameter	D (Shaft Diameter)	D1 (min)	D1 (max)	D2	D3	D4	D5	L1	L2	L3	H
020	20	36	48	56	46	54	98	45	35	21	12
025	25	41	53	61	51	59	105	45	35	21	12
028	28	44	56	64	54	62	108	45	35	21	12
030	30	46	58	66	56	64	108	45	35	21	12
032	32	48	60	68	58	66	115	45	35	21	14
035	35	51	63	71	61	69	115	45	35	21	14
038	38	57	66	76	66	74	125	51	39	22	14
040	40	59	68	78	68	76	125	51	39	22	14
042	42	61	70	80	70	78	128	51	39	22	14
045	45	64	73	83	73	81	128	51	39	22	14
048	48	67	76	86	76	84	135	51	39	22	16
050	50	69	78	88	78	86	135	51	39	22	18
055	55	74	83	93	83	91	158	51	39	22	18
060	60	79	88	98	88	96	164	51	39	22	18
065	65	87	94	108	94	105	168	57	43	24	18
070	70	92	99	113	99	110	178	57	43	24	18
075	75	99	108	122	105	119	198	60	43	24	22
080	80	105	113	128	110	124	198	60	43	24	22

No.	Part	Material	Qty
1A	Rotating ring	SiC	1
2A	O-ring	FKM	1
3A	Seal ring	SiC&Titanium	1
4A	O-ring	FKM	1
5	Plate	304 or eq.	1
6A	Spring	316 or eq.	1s
7	Spring retainer	304 or eq.	1
8	Bolt	304 or eq.	4
9A	Pin	304 or eq.	2
1B	Rotating ring	316 or eq.+ceramic	1
2B	O-ring	FKM	1
3B	Seal ring	Carbon	1
4B	O-ring	FKM	1
6B	Spring	316 or eq.	1s
9B	Pin	316 or eq.	1
30	Pin	316 or eq.	1
31	Sleeve	316 or eq.	1
32	O-ring	FKM	1
33	Stopper ring	304 or eq.	1
38	Set screw	316 or eq.	4
39	Pin	304 or eq.	2
40	Drive ring	316 or eq.	1
41	Pin	304 or eq.	1
42	O-ring	FKM	1
51	Flange	316 or eq.	1
52A	Gasket	FKM	1
52B	O-ring	FKM	1
55	Adapter	304 or eq.	1
56	Set plate	304 or eq.	3
57	Cap screw	304 or eq.	3
68	Pin	304 or eq.	2



**Follow the instructions, before installation and operation, for your safety.**

\*Specifications and dimensions are subject to change without prior notice.

\*The data on this catalogue are solely for your reference and are not to be construed as constituting a warranty.

Pillar Cassette Seal® is registered trademark of Nippon Pillar Packing Co., Ltd.

**NIPPON PILLAR PACKING CO., LTD.**

7-1, Shinmachi 1-chome  
Nishi-ku, Osaka, 550-0013 Japan  
TEL +81 6 7166 8229  
FAX +81 6 7166 8513  
(URL) <http://www.pillar.co.jp>

**DRAFT**

DISTRIBUTED BY

